

## FLEXIBLE LED RIBBONS Pixel RGB 60LED/m - 16W/m



### General features


Models	FLEXH
Voltage (V)	12-24
Number of LED/m	60
LED package	5050
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	15 (at 24V)
IC Protocol	SK6812
Number of pixel/m	60



### Photometric characteristics

References	Power (W/m)	Color CCT (K°)	Flux RGBW (Lm/m)
FLEXH-0000005	16	RGB/3000	R: 200   G: 350   B: 150   W: 375
FLEXH-0000006	16	RGB/4000	R: 200   G: 350   B: 150   W: 390
FLEXH-0000007	16	RGB/6000	R: 200   G: 350   B: 150   W: 390

### Technical drawing

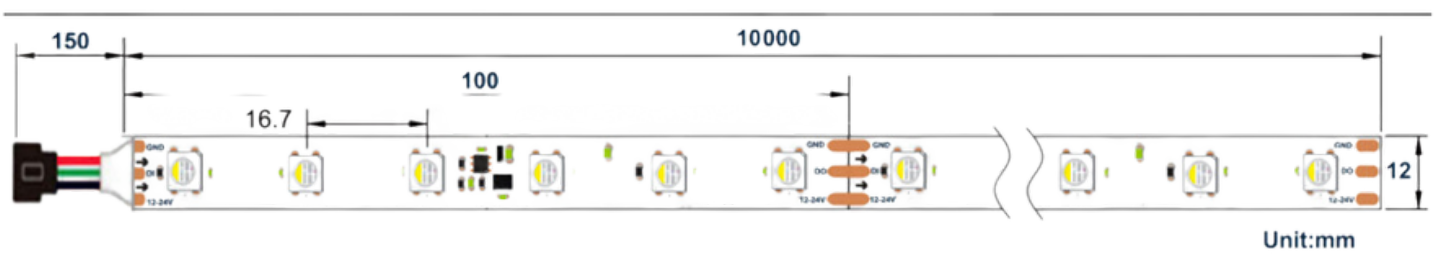

STANDARDS IEC  
IEC 62031  
IEC 62471  
IEC 62717  
IEC 61000-4-2