

FLEXIBLE LED RIBBONS Pixel RGBW 80LED/m - 22W/m



General features




Models	FLEXH
Voltage (V)	24
Number of LED/m	80
LED package	5050
Angle (°)	120
Secability (cm)	10
IP index	20
Width (mm)	12
Double-face adhesive	3M
Max. length in serie (m)	5
IC Protocol	SK6812
Number of pixel/m	80

Photometric characteristics

References	Power (W/m)	Color CCT (K°)	Flux RGBW (Lm/m)
FLEXH-0000009	22	RGB/4000	R: 265 G: 490 B: 200 W: 550

Technical drawing

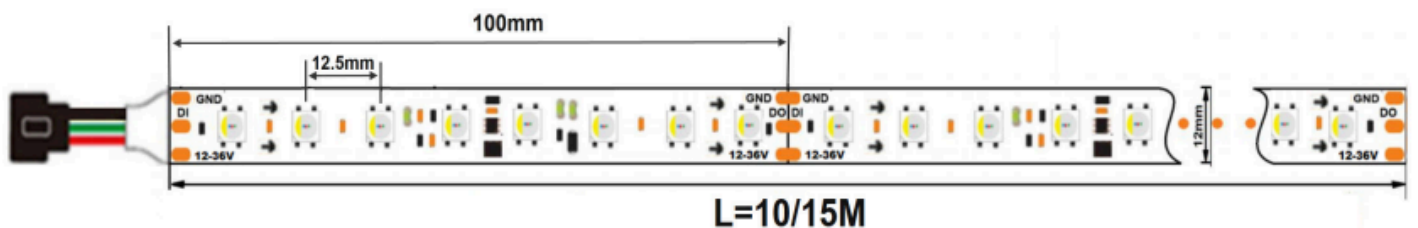

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2