

FLEXIBLE LED RIBBONS 240LED/m - 5W/m



General features


Models	FLEXA
Voltage (V)	24
Number of LED/m	240
LED package	2216
Angle (°)	120
Secability (cm)	2,5
IP index	20
Width (mm)	10
Double-face adhesive	3M
Max. length in serie (m)	10



Photometric characteristics

References	Power (W/m)	Color (°K)	CRI	Flux (Lm/m)
FLEXA-0000261	5	2700	90	350
FLEXA-0000262	5	3000	90	370
FLEXA-0000263	5	3500	90	380
FLEXA-0000264	5	4000	90	400
FLEXA-0000265	5	6000	90	410

Technical drawing

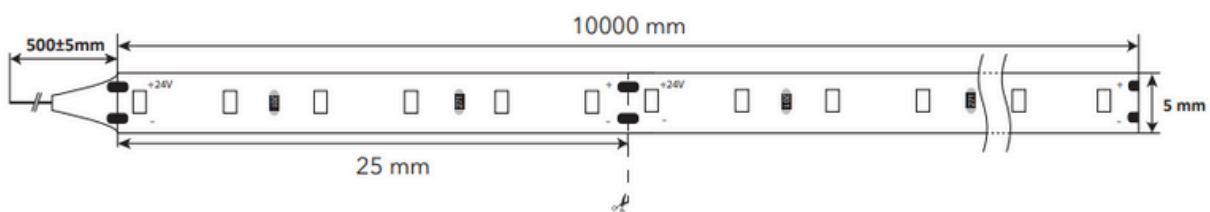

STANDARDS IEC
IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2